


GN2000

HIGH-SPEED OVERLOCK & SAFETY-STITCH SEWING MACHINE
HOCHLEISTUNGS-, OVERLOCK- UND SICHERHEITSNAHT-NÄHMASCHINE

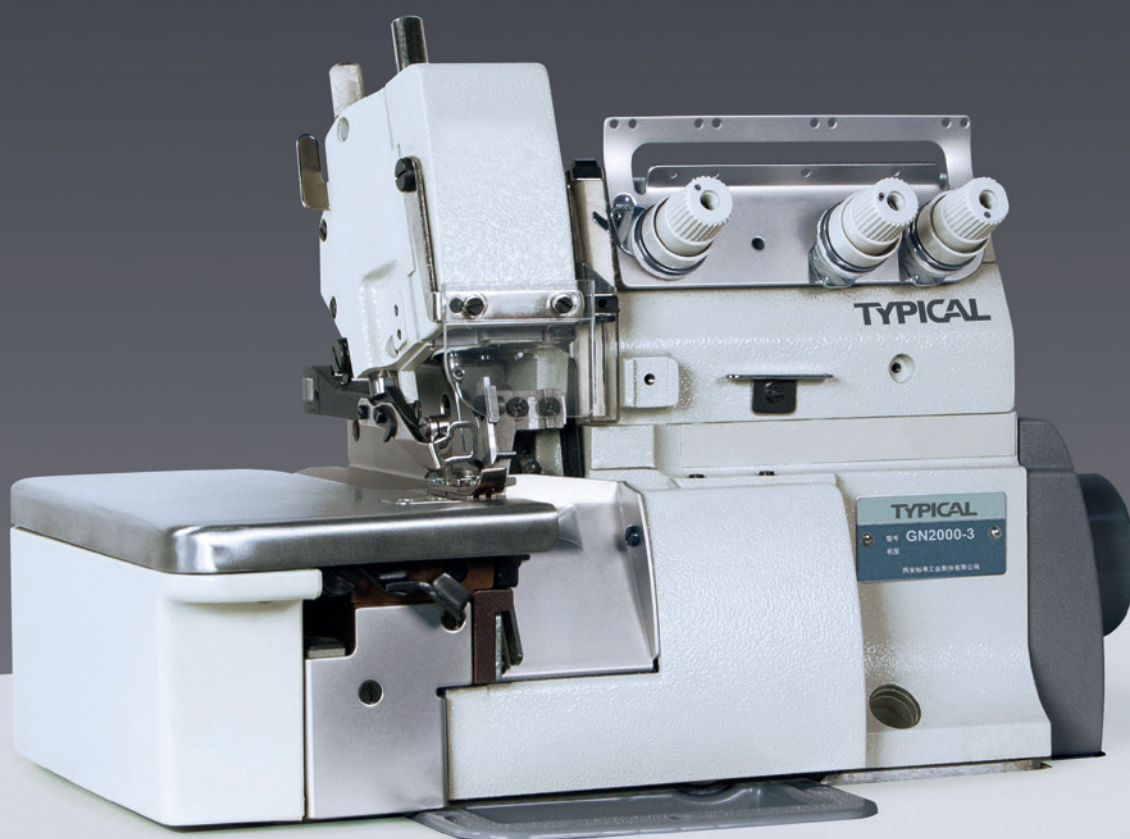

TYPICAL

EN Technical Data

- Differential drop feed with fast adjustment
- Color-coded thread guide for easy threading
- Synchronized needle guard on looper carrier for continuous seam quality
- Fully automatic lubrication system with oil filter
- Push-button stitch length regulator
- Balance wheel 55 mm eff. Dia.

Models

- **GN2000-3**
1 needle, 3 thread high-speed overlock sewing machine;
- **GN2000-4**
2 needle, 4 thread high-speed overlock sewing machine;
- **GN2000-5**
2 needle, 5 thread high-speed safety stitch sewing machine;
- **GN2000-6**
3 needle, 6 thread high-speed safety stitch sewing machine;
Stichtype 514 + 401

Carton dimensions & gross weights for sewing head

48×37×47 cm, 34 kg

* for rolled hem

** with angled edge knife for extra heavy duty materials

*** with angled edge knife for extra heavy duty materials & adjustable tape guide in sewing foot

**** for binding operations

Specifications can differ depending on model.

DE Technische Daten

- Differential-Untertransport mit Schnellverstellung
- Farbmarkierte Fadenführungen erleichtern das Einfädeln
- Mitgehender Nadelschutz am Greiferträger sichert eine durchgängige Nahtqualität
- Vollautomatische Druckumlaufschmierung mit Ölfilter
- Druck-Knopf-Stichsteller
- Handrad-Durchmesser effektiv: 55 mm

Ausführungen

- **GN2000-3**
1-Nadel, 3 Faden Hochleistungs-Overlock-Nähmaschine
- **GN2000-4**
2-Nadel, 4 Faden Hochleistungs-Overlock-Nähmaschine
- **GN2000-5**
2-Nadel, 5 Faden Hochleistungssicherheitsnaht-Nähmaschine
- **GN2000-6**
3-Nadel, 6 Faden Hochleistungssicherheitsnaht-Nähmaschine;
Stichtyp 514 + 401

Kartonmaße & Brutto-Gewichte für Nähkopf

48×37×47 cm, 34 kg

* für Rollsaum

** mit Winkelsantenmesser für extra schwere Materialien

*** mit Winkelsantenmesser für extra schwere Materialien & verstellbarer Bandführung im Nähfuß

**** für Einfassarbeiten

Angaben können je nach Ausführung abweichen.



GN2000-3		504	7,000	1	3	0.5–3.8	4	-	5.5	0.7–1.7
	B*	504	7,000	1	3	0.5–3.8	1.5	-	5.5	0.7–1.7
GN2000-4	H	514	6,500	2	4	0.5–3.8	4	2	6	0.7–1.7
	H-A***	514	6,500	2	4	0.5–3.8	4	2	6	0.7–1.7
	G****	2 x 401	5,500	2	4	0.5–3.8	-	5	3.5	0.7–1.7
GN2000-5	(3x5)	516	6,500	2	5	0.5–3.8	5	3	5.5	0.7–1.7
	(5x5)	516	6,500	2	5	0.5–3.8	5	5	5.5	0.7–1.7
	5H	516	5,500	2	5	0.6–5.3	6	5	6	0.6–1.3
	5H-A**	516	5,500	2	5	0.6–5.3	6	5	6	0.6–1.3
GN2000-6	(3x2x4)	514 + 401	6,500	3	6	0.5–3.8	4	3 + 2	5.5	0.7–1.7

XI'AN TYPICAL EUROPE GmbH

Hertelsbrunnenring 9

D-67657 Kaiserslautern

Tel.: +49 (0)631 316019-0

Fax: +49 (0)631 316019-11

E-mail: sales@typical-europe.com

www.typical-europe.com

