


GK350D

DIRECT-DRIVE HIGH-SPEED FLATBED INTERLOCK CHAINSTITCH SEWING MACHINE
HOCHGESCHWINDIGKEITS-, FLACHBETT-ÜBERDECKNAHT-NÄHMASCHINE MIT DIREKTANTRIEB

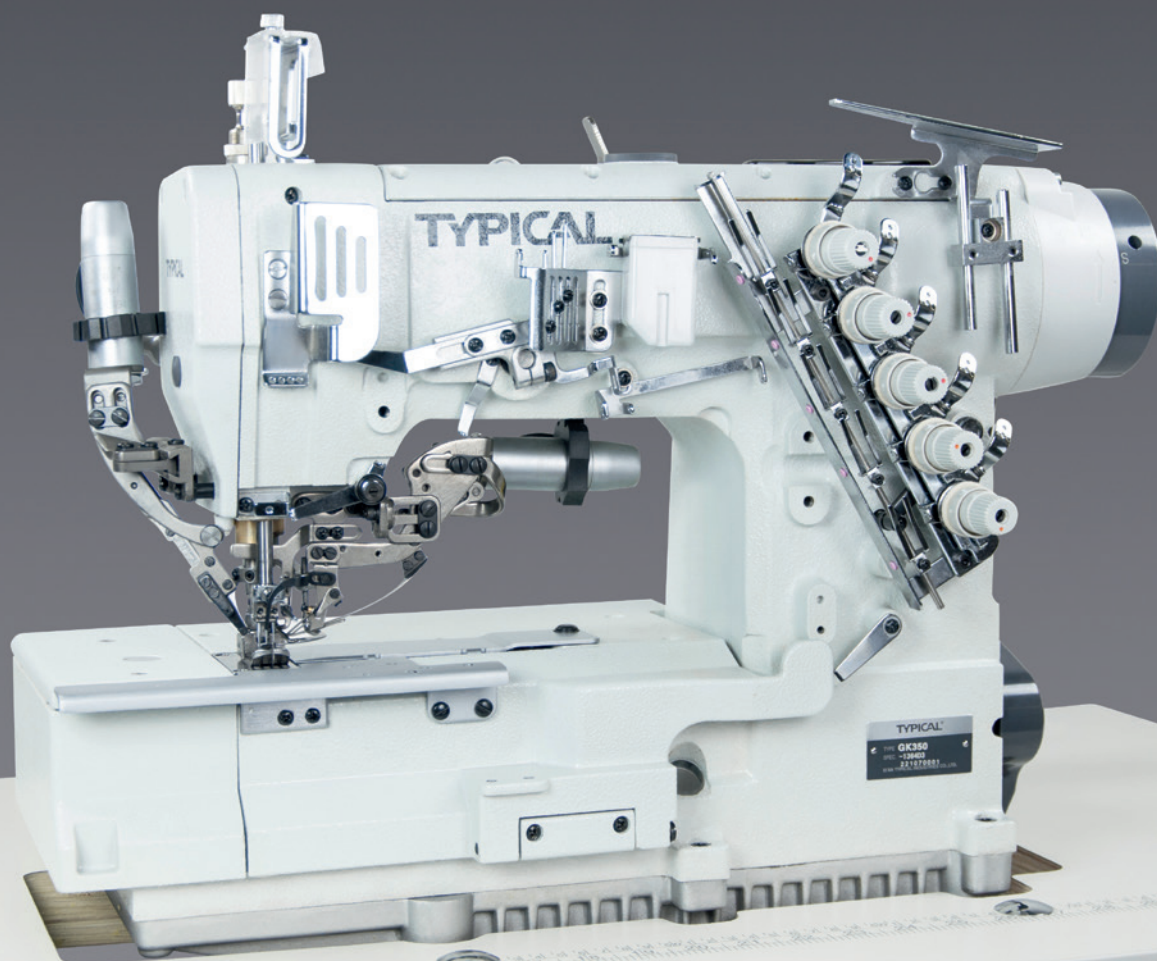

TYPICAL

EN Technical Data

- Stitch type 605 (cover stitch)
- Max. sewing speed 6,000 spm. (**GK350D**)
- Differential drop feed
- Max. stitch length 4.5 mm
- Balance wheel 55 mm eff. Dia.
- Optimized thread guide for individual adjustment of each single needle thread
- Available needle distances: 4.8, 5.6 & 6.4 mm

Clearance under the arm

215×113 mm

Fully automatic lubrication system

Models

- **GK350D** | Direct-drive 3 needle, 5 thread cover stitch machine for basic operations; with integrated motor **YSC-8330-D1**
- **GK350D3** | Same as **GK350D**, but with
 - automatic thread trimming
 - presser foot lift (solenoid)

Carton dimensions & gross weights for sewing head

- **GK350D** 58×45×63 cm, 48 kg
- **GK350D3** 63×45×63 cm, 51 kg

Specifications can differ depending on model.

DE Technische Daten

- Stichtyp 605 (Überdeckstich)
- Max. Nähgeschwindigkeit 6.000 Stiche / Minute (**GK350D**)
- Differential-Untertransport
- Max. Stichlänge 4,5 mm
- Handrad-Durchmesser effektiv 55 mm
- Optimierte Fadenführung zum individuellen Fadenabzug & Einstellen jedes einzelnen Nadelfadens
- Nadelabstände in 4,8 / 5,6 / 6,4 mm erhältlich

Durchgangsraum im Nähmaschinenarm

215×113 mm

Vollautomatisches Schmiersystem

Ausführungen

- **GK350D** | Direktantrieb 3-Nadel, 5-Faden Überdeckstich-Nähmaschine für Standard-Näharbeiten mit integriertem Motor **YSC-8330-D1**
- **GK350D3** | Wie **GK350D** jedoch mit
 - automatischem Fadenabschneider (elektromagnetisch)
 - automatischer Fußlüftung (elektromagnetisch)

Kartonmaße & Brutto-Gewichte für Nähkopf

- **GK350D** 58×45×63 cm, 48 kg
- **GK350D3** 63×45×63 cm, 51 kg

Angaben können je nach Ausführung abweichen.

														
GK 350-	D	3×605	6,000	•	1:2	2.2–4.5	UY×128GAS	4.8, 5.6,	1×	5×	6	—	—	L/M
	D3		5,000		1–0.7		65-90	6.4				•	•	

XI'AN TYPICAL EUROPE GmbH

Hertelsbrunnenring 9
D-67657 Kaiserslautern
Tel.: +49 (0)631 316019-0
Fax: +49 (0)631 316019-11

E-mail: sales@typical-europe.com
www.typical-europe.com

