


GK0056

HIGH-SPEED FLATBED CHAINSTITCH SEWING MACHINE
HOCHGESCHWINDIGKEITS-, FLACHBETT-DOPPELKETTENSTICH-NÄHMASCHINE

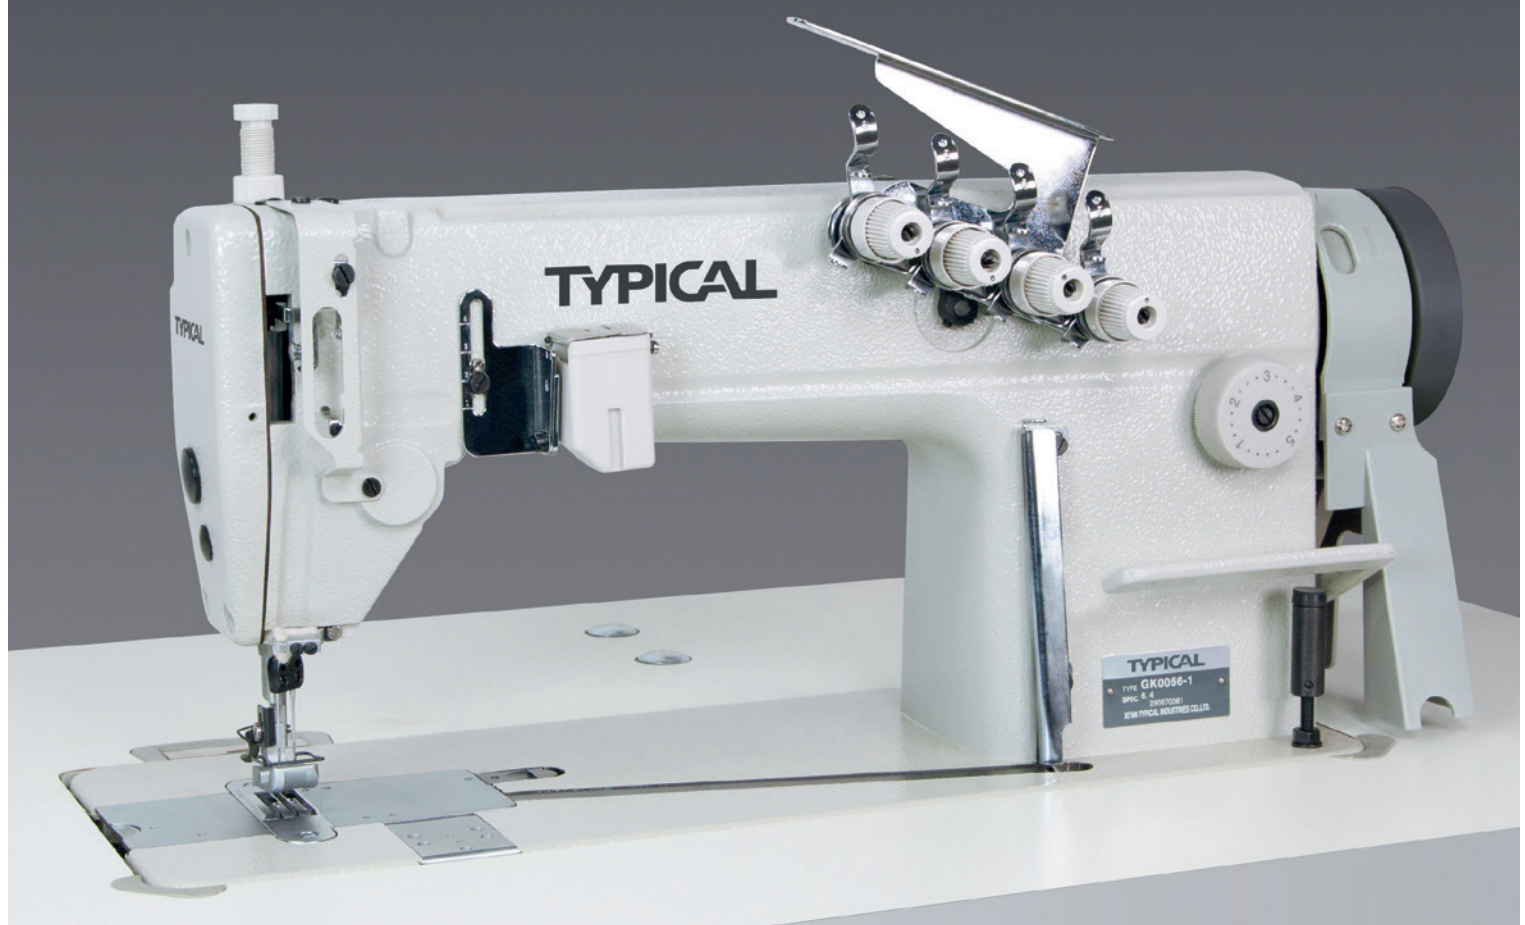

TYPICAL

EN Technical Data

- Stitch type 301 (Double Chainstitch)
- Max. sewing speed 4,000 spm.
- Max. stitch length 5 mm
- Max. fabric clearance 5.5 mm
- Balance wheel 65 mm eff. Dia.
- Drop feed

Clearance under the arm

260×130 mm

Automatic oil pump lubrication system

Models

- **GK0056-1** | 2 needle, 4 thread (2×401) chainstitch machine; Standard needle distance 6.4 mm (also available: 3.2, 4.0, 4.8, 5.6, 7.9, 9.5, 12.7 mm)
- **GK0056-2** | 1 needle, 2 thread (1×401) chainstitch machine
- **GK0056-3** | 2 needle, 4 thread (2×401) chainstitch machine, needle alignment in line; Standard needle distance 4.8 mm;
- **GK0056-4A** | 3 needle, 6 thread (3×401) chainstitch machine, needle alignment diagonal; Standard needle distance 6.4 mm (others on request)
- **GK0056-4B** | same as **GK0056-A**, but needle alignment in triangle style

Carton dimensions & gross weights for sewing head

70×28×51 cm, 39 kg

Specifications can differ depending on model.

DE Technische Daten

- Stichtyp 301 (Doppelkettenstich)
- Max. Nähgeschwindigkeit 4.000 Stiche / Minute
- Max. Stichlänge 5 mm
- Max. Durchgang unter dem Nähfuß 5,5 mm
- Handraddurchmesser effektiv 65 mm
- Untertransport

Durchgangsraum im Nähmaschinenarm

260×130 mm

Automatisches Druckumlauf Schmiersystem

Ausführungen

- **GK0056-1** | 2-Nadel, 4 Faden (2×401) Doppelkettenstich- Schnellnäher; Standard-Nadelabstand 6,4 mm (erhältlich auch in 3,2 / 4,0 / 4,8 / 5,6 / 7,9 / 9,5 / 12,7 mm)
- **GK0056-2** | 1-Nadel, 2 Faden (1×401) Doppelkettenstich- Schnellnäher
- **GK0056-3** | 2-Nadel, 4 Faden (2×401) Doppelkettenstich- Schnellnäher; Nadelabstand 4,8 mm; Nadelanordnung Inline
- **GK0056-4A** | 3-Nadel, 6 Faden (3×401) Doppelkettenstich-Schnellnäher; Standard-Nadelabstand 6,4 mm (andere Nadelabstände auf Anfrage) Nadelanordnung
- **GK0056-4B** | wie **GK0056-A**; jedoch Nadelanordnung in Dreiecksform

Kartonmaße & Brutto-Gewichte für Nähkopf

70×28×51 cm, 39 kg

Angaben können je nach Ausführung abweichen.



GK 0056-	1	2×401	4,000	•	1.4–5.0	TV×7 90-130NM	31.8	6.4	2×	4	5.5	M
	2	1×401		•				–	1×	2		M
	3	2×401		•				4.8	2×	4		M
	4A / 4B	3×401		•				6.4	3×	6		M

XI'AN TYPICAL EUROPE GmbH

Hertelsbrunnenring 9
D-67657 Kaiserslautern
Tel.: +49 (0)631 316019-0
Fax: +49 (0)631 316019-11

E-mail: sales@typical-europe.com
www.typical-europe.com

