

EN Technical Data

- Stitch type 301 Lockstitch
- Max. sewing speed 2,200 spm
- Max. stitch length 6.0 mm
- Max. top feed stroke 7.0 mm
- Max. fabric clearance 14 mm
- Needle system 134-17/DP×17
- Needle size Nm 80-100
- Balance wheel 80 mm eff. Dia.
- Recommended motor power minimum 0.55 kW
- Cylinder arm diameter 46.5 mm

Clearance under the arm
257×110 mm

Carton dimensions and gross weights for sewing head:
63×28×60 cm; 44 kg

Specifications can differ depending on model.

DE Technische Daten

- Stichtyp 301 Doppelsteppstich
- Max. Nähgeschwindigkeit 2.200 Stiche / Minute
- Max. Stichlänge 6,0 mm
- Max. Obertransporthub 7,0 mm
- Max. Durchgangsraum unter den Nähfüßen 14 mm
- Nadelsystem 134-17/DP×17
- Nadelstärke Nm 80-100
- Handraddurchmesser effektiv 80 mm
- Empfohlene Motorleistung mind. 0,55 kW
- Freiarm Ø 46,5 mm

Durchgangsraum im Nähmaschinenarm
257×110 mm

Kartonmaße und Brutto-Gewichte für Nähkopf:
63×28×60 cm; 44 kg

Angaben können je nach Ausführung abweichen.

             															
TW3-P335		•	2,200	•	6.0 mm	134-17/ DP×17 80-100	33.4	Standard	Ø 46.5	10/14	40/3	—	—	—	M/H
	V	•		•				Standard				—	—	—	
	B	•		•				Large				—	—	—	
	VB	•		•				Large				—	—	—	
	D2-T3	•		•				Standard				•	•	•	
	B-D2-T3	•		•				Large				•	•	•	

TW3-P335
CYLINDER ARM COMPOUND FEED LOCKSTITCH SEWING MACHINE
FREIARM-, 3-FACH-TRANSPORT-, DOPPELSTEEPSTICH-NÄHMASCHINE




XI'AN TYPICAL EUROPE GmbH
Hertelsbrunnenring 9
D-67657 Kaiserslautern
Tel.: +49 (0)631 316019-0
Fax: +49 (0)631 316019-11

E-mail: sales@typical-europe.com
www.typical-europe.com



TW3-P335 – en/de – 05-2013

TYPICAL

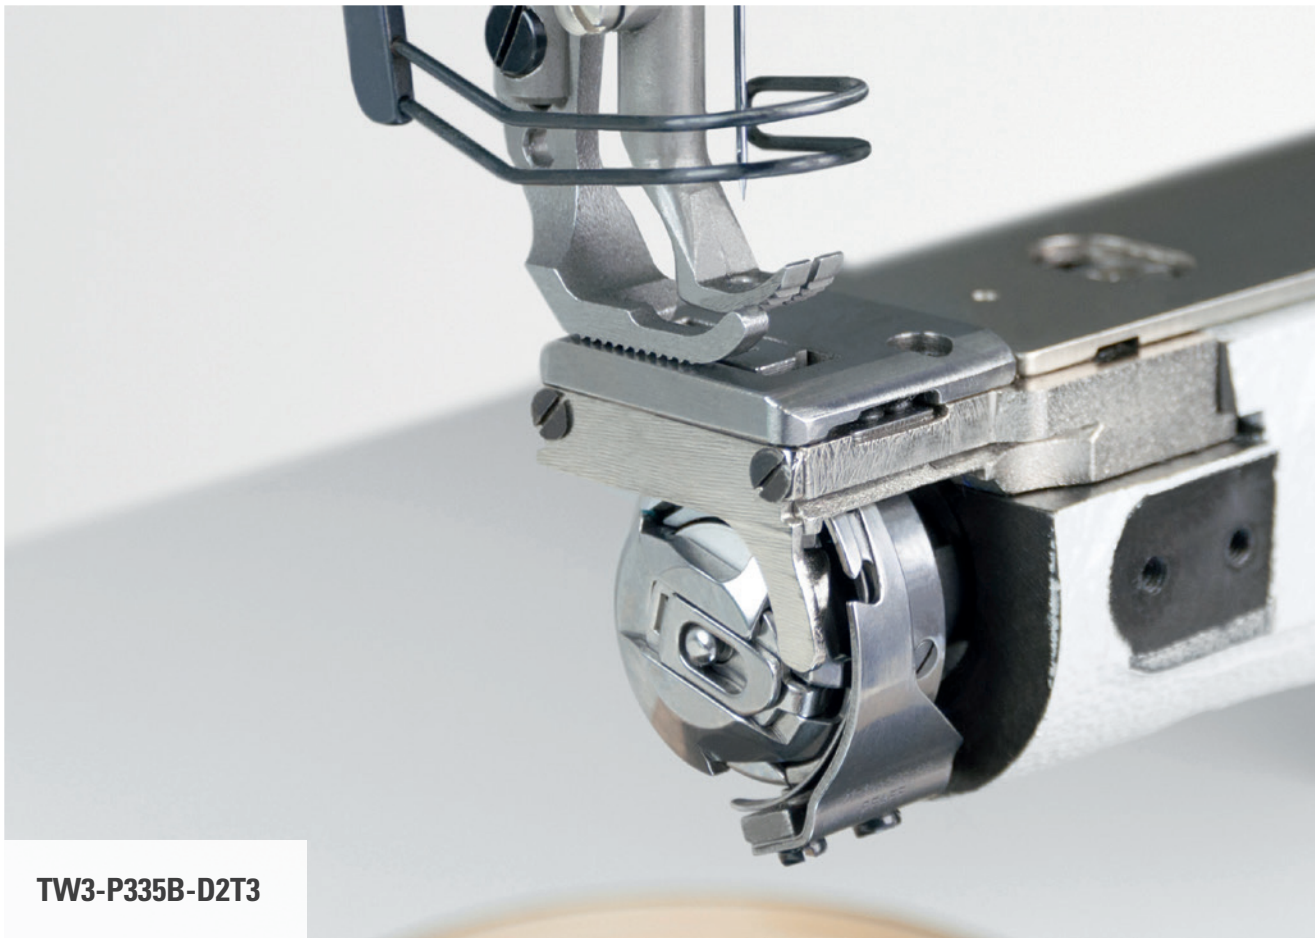

TW3-P335B-D2T3

EN Features & Benefits

- Slim cylinder arm diameter 46.5 mm
- Compound feed
- 2.5–7.0 mm top feed stroke allows easy sewing – even at cross-seams
- 14 mm clearance under the lifted sewing feet for easy loading and unloading
- Max. 6 mm stitch length adjustable – forwards and backwards
- Integrated bobbin winder

Application

Upholstery industry, automotive industry, technical textiles, leather apparel, small leather goods, shoes, etc.

Options

- **TW3-P335V**
binding attachment synchronized with feed movement
- **TW3-P335B**
with big hook (+40% bobbin thread capacity)
- **TW3-P335VB**
binding attachment synchronized with feed movement & big hook (+40% bobbin thread capacity)

DE Merkmale & Vorteile


- Schlanker Freiarm Ø 46,5 mm
- 3-fach Transport
- 2,5–7,0 mm Obertransporthub für sicheres Transportieren – auch über Quernähte
- 14 mm Durchgangsraum unter den Nähfüßen für einfaches Einlegen und Entnehmen des Nähguts
- Max. 6 mm Stichlänge – Vorwärts und Rückwärts
- Integrierter Unterfadenspuler

Anwendungen


Polsterindustrie, Automobilindustrie, technische Textilien, Lederbekleidung, Kleinlederwaren, Schuhe, usw.

Optionen

- **TW3-P335V**
mit mitgehendem Bandeinfasser
- **TW3-P335B**
mit großem Greifer (40% mehr Spulenkapazität)
- **TW3-P335VB**
mit mitgehendem Bandeinfasser und großem Greifer (40% mehr Spulenkapazität)

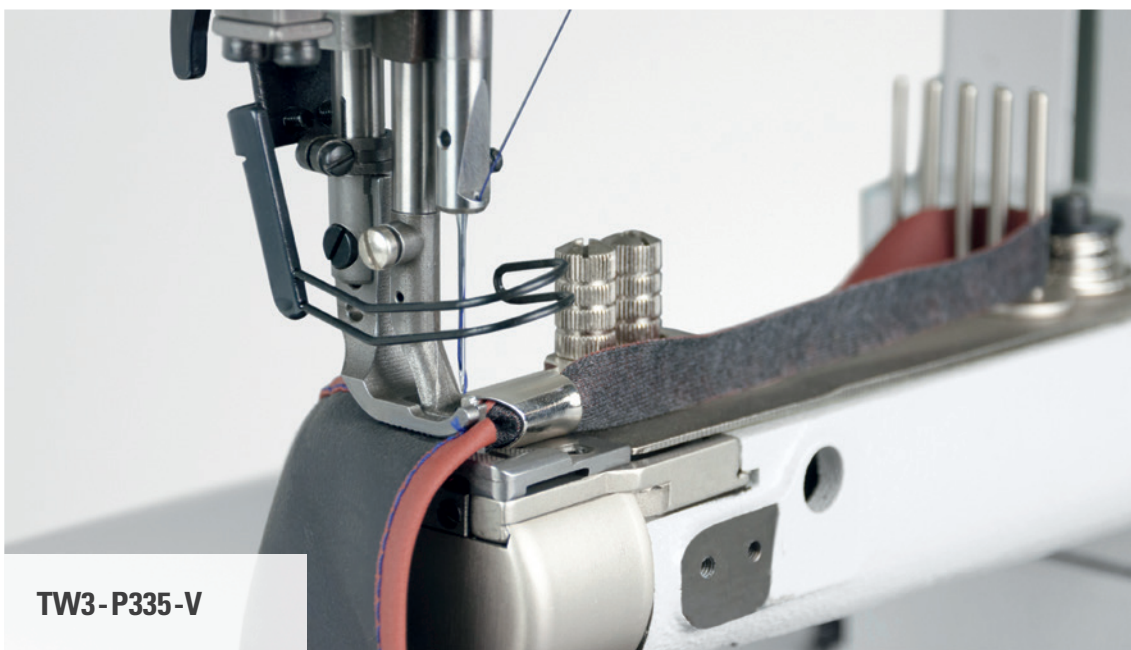

TW3-P335-V

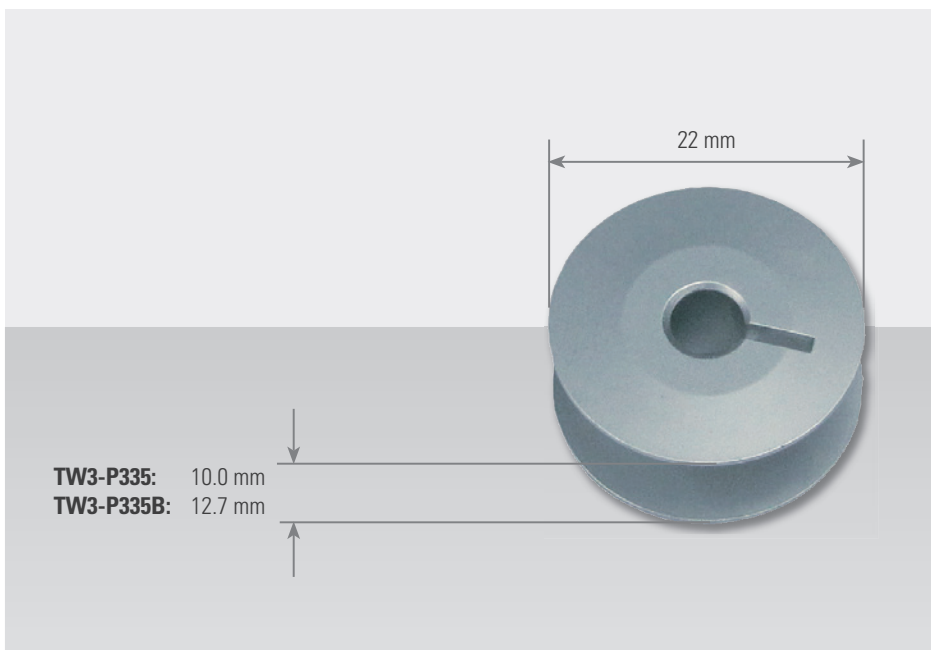

TYPICAL
TW3-P335