



PEGASUS®

M900 series

M932 : Safety stitch machines
M952 : Overedgers
M922 : Double chainstitch machine

NEW
PRODUCTS

Basic machines further advanced! M900 series



Common specifications

No. of needles	: 1 - 3 needles
No. of threads	: 3 - 6 threads
Max machine speed	: 7,000 sti/min
Stitch length	: Max 5.3mm
Overedge width	: 1.5 mm - 7.0 mm
Diff. feed ratio	: 1 : 0.7 - 1 : 1.7
Presser foot lift	: Max. 7.0 mm

* Detail of common specifications may change depending on subclasses and sewing conditions.



This Anti-copy (-counterfeit) Sticker certifies that the sewing machine is a genuine product of PEGASUS SEWING MACHINE MFG. CO., LTD. If you look at this sticker through an exclusive "viewer," an original PEGASUS hidden image will appear.

Point 1

Dirt and dust prevention measures strengthened further!

Thanks to our excellent oil blocking mechanisms, including a totally enclosed needle bar chamber, with a force-drain function, and other similar features, the M900 series protects your important sewn products from oil stains.

The upper looper mechanism includes special functions, so dirt and dust prevention measures have been strengthened further. This machine-friendly feature prevents dirt and dust from getting into the inside of the machine, contributing to an increase in production.

Point 3

Introduction of the rustproof needle plate

This needle plate is surface-treated as a rust prevention measure. Thanks to this feature, the needle plate is not damaged by fabrics processed with chemical agents and/or dyes.

Point 2

Achieves a maximum machine speed of 7,000 sti/min

resulting in production increases.



Point 4

The M900 Series can respond to the use of different kinds of fabrics and/or sewn products by changing the position of the shaft of the presser arm.

In addition, this series can use PEGASUS' conventional machine parts and labor saving devices (note that some special parts are needed).



● M900 series Subclasses

M922 : Double chainstitch machine


Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max. stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max speed (sti/min)	Needles	Accessories	Optional devices	Remarks
①	Binding tape	Light to medium	M922-02x250-24	2	4	5	-	3.8	0.7-1.7	3.5	6,000	DCx27 #14(90)	Binder 24mm(6)	TK	

M932 : Safety stitch machines

Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max. stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max speed (sti/min)	Needles	Accessories	Optional devices	Remarks
② ③	Plain seaming	Medium	M932-38-3x4	2	5	3	4	3.8	0.7-1.7	5.5	7,000	DCx27 #14(90)		TK/KH	
			M932-70-5x5			5	5								
		Extra heavy	M932-86-5x6			5	6	5.3	0.6-1.3		5,500	DCx27 #21(130)	Caterpillar presser foot		
④	Shirring	Light to medium	M932-48-3x4	2	5	3	4	3.3	1-2.8	5.5	5,500	DCx27 #14(90)	Shirring device	TK/KH	
⑤	Shirring while piping	Light to medium	M932-48P2-3x4	2	5	3	4	3.3	1-2.8	5	5,000	DCx27 #14(90)	Shirring device Binder 25mm	TK	
⑥	3-needle versatile	Medium	M932-355-3x2x4	3	6	3+2	4	3.8	0.7-1.7	5.5	6,000	DCx27 #11(75)		TK/KH	
⑦	Attaching U-shaped tape	Medium	M932-551-5x2.5x3.5	3	6	5+2.5	3.5	3.8	0.7-1.7	5.5	6,000	DCx27 #11(75)		TK	

M952 : Overedgers

Seam	Application	Fabric weight	Subclass	No. of needles	No. of threads	Needle space (mm)	Overedge width (mm)	Max. stitch length (mm)	Diff. feed ratio	Presser foot lift (mm)	Max speed (sti/min)	Needles	Accessories	Optional devices	Remarks
⑧	Blindstitch hemming	Light to medium	M952-01-4	1	3	-	4	3.8	0.7-1.7	5.5	7,000	DCx27 #9(65)	Blindstitch hemming welt guide (40mm)	KS	
⑨ ⑩	Plain seaming	Light to medium	M952-17-4	1	3	-	4				7,000			KS	
			M952-13-2x4				4								
			M952-13-2x5				5								
		Medium	M952-13H-2x4				4				6,000		With presser foot for attaching tape	KS/TK	
			M952-13H-2x5				5								
			M952-13H-2x7	2	4	2	7	3.8	0.7-1.7	5.5		DCx27 #9(65)		KH/TK	Multi use for plain seam and attach tape
		Light to medium	M952-52-2x4				4				7,000		Needle plate with chaining land, With presser foot for attaching tape	KS/TK	
			M952-52-2x5				5								
			M952-52H-2x4				4				6,000				
			M952-52H-2x5				5								
		Extra heavy	M952-23B-2.5x4.5	2	4	2.5	4.5	2.7	1.2-3.5	7	6,500	DCx27 #11(75)		KS	
⑪	Turn down hemming	Light	M952-16S2-1.5	1	3	-	1.5	3.8	0.7-1.7	5.5	7,000	DCx27 #11(75)		KS	
⑫ ⑬	Backlatching	Light to medium	M952-180-4	1	3	-	4	3.8	0.7-1.7	5.5	7,000	DCx27 #9(65)	Manual backlatching device(BT9B)	KS	
			M952-181-2x4	2	4	2				4.8			Manual backlatching device(BT9C)		
⑭	Butt-end sewing	Light to medium	M952-90-6	1	2	-	6	3.8	0.7-1.7	3	5,000	DCx27 #14(90)	Wide knives		

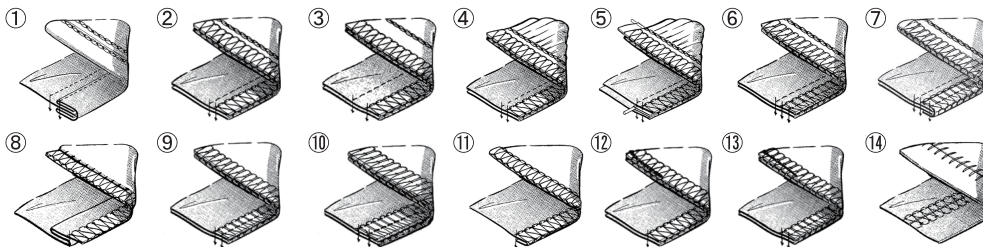

PEGASUS SEWING MACHINE MFG. CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan TEL : +81-6-6458-4739 / FAX : +81-6-6454-8785

URL : <http://www.pegasus.co.jp>

※ The specification and/or appearance for equipment described in this catalog are subject to change because of modification without previous notice.

©2014 PEGASUS SEWING MACHINE MFG. CO., LTD.

Catalog No. 102931 Produced March 2014.

