BASS3200

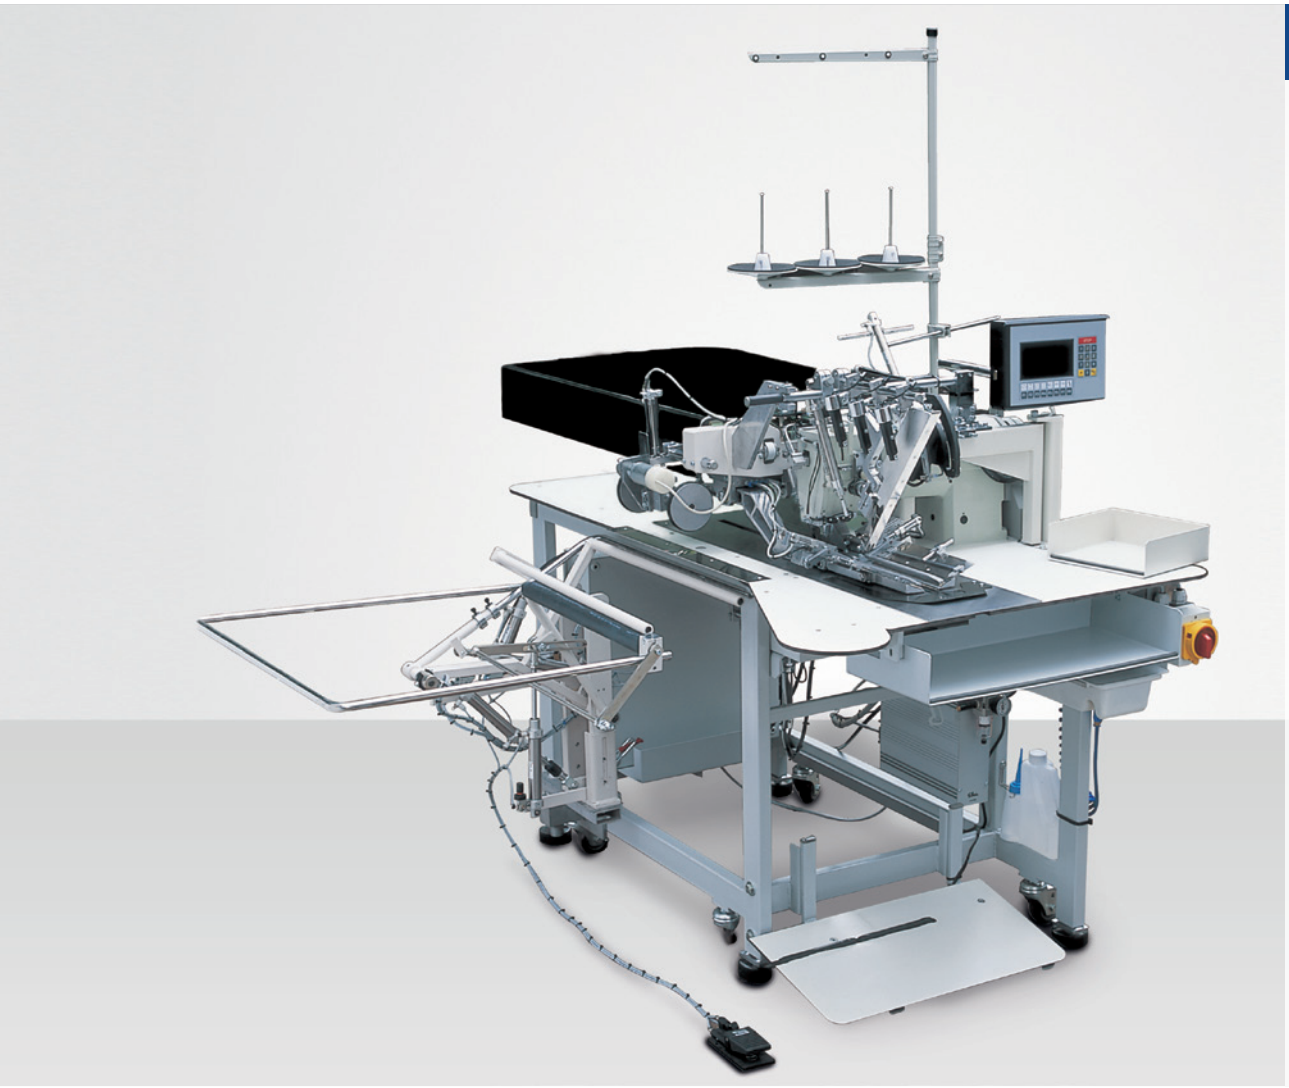

POCKET WELT SEWING UNIT
TASCHENPASPEL-NÄHAUTOMAT

TYPICAL

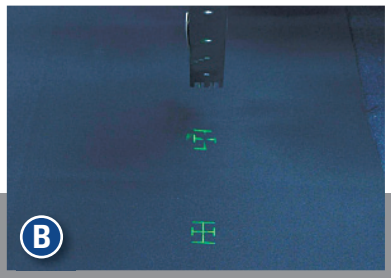

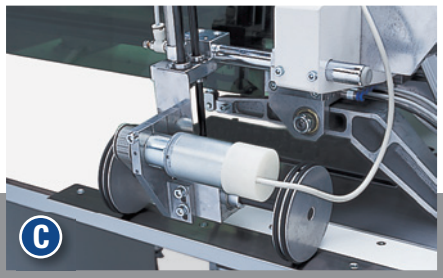



Standard Equipment

- 2 Needle lockstitch fast seamer **TYPICAL GC6842**; Max. sewing speed 3,000 spm (BASS 3200)
- 2 Needle lockstitch fast seamer **TYPICAL GC6845**; Max. sewing speed 3,000 spm (BASS 3200-S) and split needle bar
- Available needle distances from 8 – 30 mm (in 2 mm steps)
- Center knife
- LCD graphic control panel for easy understanding and programming
- Automatic and programmable corner knifes for an accurate cut, driven by step motor (A)
- 5 laser marking lights for a precise and fast positioning of fabric (B)
- Photo cell for a precise scanning of flap length
- Selectable bar tack at the beginning and end or condense stitch
- Free programmable microprocessor control for up to 40 different pocket seams
- Efka electronic motor AB286, DC1500, 220V
- Seam length programmable from 20 - 200 mm, driven by step motor
- Stitch length programmable from 0.5 -3.0 mm
- Automatic thread cutter for needle thread and bobbin thread
- Needle thread monitor
- Bobbin thread sensor for recognicion of remaining bobbin thread
- Double welt attachment
- Sewing head and corner knifes and folding station with swing-out device for easy maintanance
- Pocket pouch clamp for loading pocket pouches
- Piececounter
- Racks for pocket pouch and piping

Options:

- Single welt attachment
- Vacuum device for precise positioning of fabrics
- Vacuum motor 220 V
- 2nd. photo cell for a quick change between trouser and jacket production
- Flip stacker (jacket production)
- Bundle clamp (trouser production)
- Ejector roller (trouser production) (C)
- Dart stretcher for trousers (D)
- Tape feeder and tape cutter programmable for highest quality
- Blowing out device for trousers
- Pneumatic clamp quick adjustment

Standard-Ausstattung

- 2-Nadel Doppelsteppstich-Schnellnäher **TYPICAL GC6842**; Max. Nähgeschwindigkeit 3.000 Stiche / Minute (BASS 3200)
- 2-Nadel Doppeslsteppstich Schnellnäher **TYPICAL GC6845**; Max. Nähgeschwindigkeit 3.000 Stiche / Minute (BASS 3200-S) mit ausschaltbarer Nadelstange
- Nadelabstände von 8 – 30 mm erhältlich (in 2 mm Schritten)
- Mittenmesser
- LCD Grafik Bedienfeld leicht verständlich und programmierbar
- Automatische und programmierbare Eckenmesser für einen exakten Schnitt, Schrittmotor angetrieben (A)
- 5 Laser Markierleuchten zum präzisen und schnellen Positionieren der Zuschnitte (B)
- Fotozelle am Maschinenkopf für präzises Abtasten der Pattenlänge
- Wählbarer Anfangs-, Endriegel oder Stichverdichtung
- Frei programmierbare Mikroprozessorsteuerung mit bis zu 40 unterschiedlichen Nahtprogrammen
- Efka Elektronikmotor AB286, DC1500, 220V
- Nahtlänge von 20 - 200 mm programmierbar, von Schrittmotor angetrieben
- Stichlänge von 0,5 - 3,0 mm programmierbar
- Automatischer Fadenabschneider für Nadel- und Unterfaden
- Nadelfadenüberwachung
- Spulenfadenwächter
- Doppelpaspelapparat
- Nähkopf, Eckenmesser und Faltstation ausschwenkbar für erleichterte Servicearbeiten
- Taschenbeutelklemme für untergelegten Taschenbeutel
- Stückzähler
- Ablagen für Taschenbeutel und Paspel

Optionen:

- Einfachpaspelapparat
- Vakuumstation für leichteres und präziseres Positionieren der Zuschnitte
- Vakuum Motor 220 V
- 2. Fotozelle für schnellen Wechsel von Sakko- auf Hosenfertigung
- Überwurfstapler (Sakkofertigung)
- Bündelklammer (Hosenfertigung)
- Ausroller (Hosenfertigung) (C)
- Niederhalter für Hinterhosen, zum Ausstreifen der Mehrweite (D)
- Vlieszuführung und programmierte Abschneidevorrichtung für höchste Qualitätsansprüche
- Ausblasvorrichtung für Hinterhosen
- Pneumatische Klammerschnellverstellung

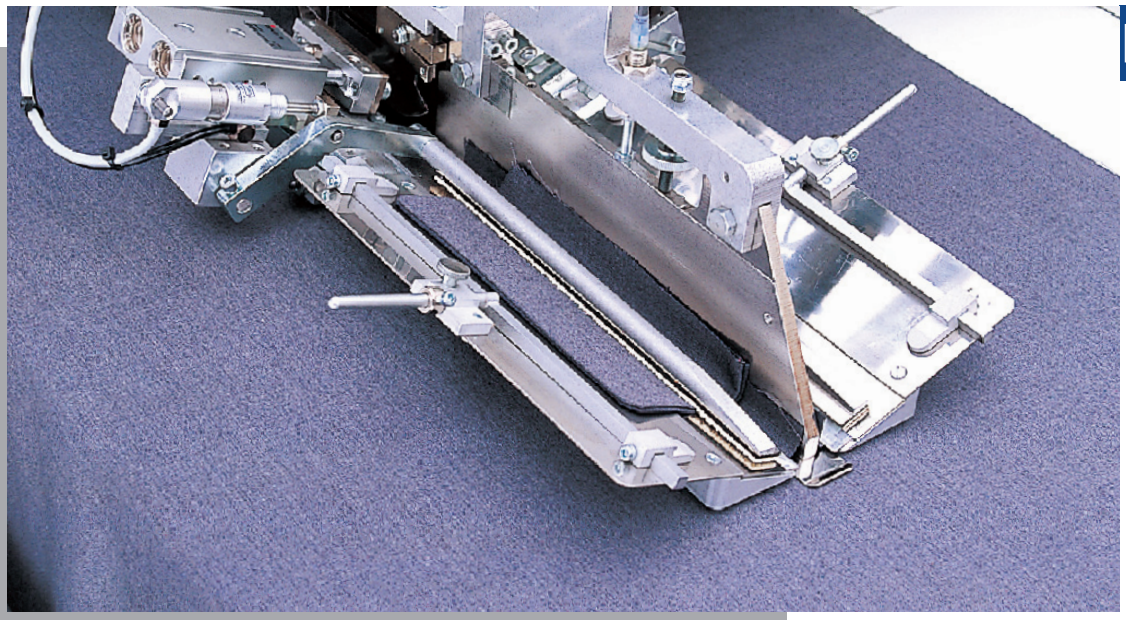

BASS3200

POCKET WELT SEWING UNIT
TASCHENPASPEL-NÄHAUTOMAT







Features & Benefits

TYPICAL BASS 3200 and **TYPICAL BASS 3200-S** are sewing units for welt pockets that allow a high-flexible and efficient production of

- Single welt pockets (1)
- Double welt pockets with and without flap (2)
- Inside (lining) welt pockets (3)
- Slant pockets (4)

This ensures highest quality in the production of

- Men´s jackets and trousers
- Women blazers
- Trendy coats and skirts
- Anoraks

Merkmale & Vorteile

TYPICAL BASS 3200 und **TYPICAL BASS 3200-S** sind Taschenpaspelautomaten für höchste Flexibilität und Rationalität zur Fertigung von

- Einfachpaspeltaschen (Leistentaschen) (1)
- Doppelpaspeltaschen mit und ohne Patte (2)
- Futterpaspeltaschen (3)
- Schrägtaschen (4)

Dies garantiert höchste Qualität bei der Produktion von

- Sakkos und Hosen
- Damenblazern
- Modischen Jacken und Röcken
- Anoraks

BASS3200

POCKET WELT SEWING UNIT
TASCHENPASPEL-NÄHAUTOMAT

Technical Data

- Daily output in 8 hours appx. 1,400 - 1,600 welt pockets

Dimensions
1650 x 800 x 1300 mm (LxWxH)
1650 x 1170 x 1300 mm (LxWxH) (**with stacker**)
Table height: 85 - 115 cm
Weight: 200 kg (220 kg with stacker)
Power supply: 220V 50/60 Hz, 0.7KW

Models
Automatic sewing unit for an efficient and flexible sewing of double welt and single welt pockets
- **BASS3200** for rectangular welt pockets
- **BASS 3200-S** for rectangular and slanted welt pockets

Technische Daten

- Tagesleistung in 8 Stunden ca. 1.400 - 1.600 Paspeltaschen

Abmessungen
1650 x 800 x 1300 mm (LxBxH)
1650 x 1170 x 1300 mm (LxBxH) (**mit Stapler**)
Tischhöhe: 85 - 115 cm
Gewichte: 200 kg (220 kg mit Stapler)
Stromversorgung: 220V 50/60 Hz, 0,7KW

Ausführungen
Taschenpaspel-Automat zum rationellen und flexiblen Nähen von Doppelpaspeltaschen und Einfachpaspeltaschen
- **BASS3200** für rechtwinklige Paspeltaschen
- **BASS 3200-S** für rechtwinklige und schräge Paspeltaschen

° **Option**

** Other needle distances on request.
Andere Nadelabstände auf Anfrage.

Specifications can differ depending on model.
Angaben können je nach Ausführung abweichen.

Certificate of the international ISO9001 | Certificate of the ISO14001 | Certificate of the international CE | Certificate for Ecolabelling Product | Certificate for Energy Conservation Product

XI´AN TYPICAL EUROPE GmbH
Hertelsbrunnenring 9
D-67657 Kaiserslautern
Tel.: +49 (0)631 316019-0
Fax: +49 (0)631 316019-11

E-mail: sales@typical-europe.com
www.typical-europe.com

BASS3200 – en/de – 11-2010